

Description

The FOC series 2 Way Pillar Hydrant is an outdoor fire hydrant with two outlets designed for connecting fire hoses and providing a reliable water supply during emergencies. Its two separate connections allow multiple hoses to be used at once, enhancing firefighting efficiency. The pillar structure, installed above ground, ensures visibility and easy access. Available in yellow or red, the color indicates the water supply source: yellow signifies a public water connection, while red indicates a private system. It is typically used in public spaces, industrial areas, or near buildings as a key component of fire protection systems.



Features


- Hydrant body is made of ductile iron, and outlets are brass for long-term durability.
- Working pressure of 16 bar and testing pressure of 24 bar ensure stable performance.
- 4" flanged inlet and 2x2.5" BS336 outlets for easy installation, maintenance, and use.
- Surface treatment options include red/yellow paint or powder coating.

Technical Specifications

| | |
|-------------------|--|
| Model | FOC-OH-PO2 |
| Hydrant Type | Overground, Wet Barrel, Pillar Hydrant |
| Valve Type | Oblique Landing Valve |
| Inlet | 4" Flange |
| Outlet | 2x2.5" BS336 |
| Working Pressure | 16 bar |
| Testing Pressure | 24 bar |
| Surface Treatment | Red / Yellow Painted or Powder Coated |

Note: For other customization requirements, please directly contact FOCUSMASTER team.

Dimensions

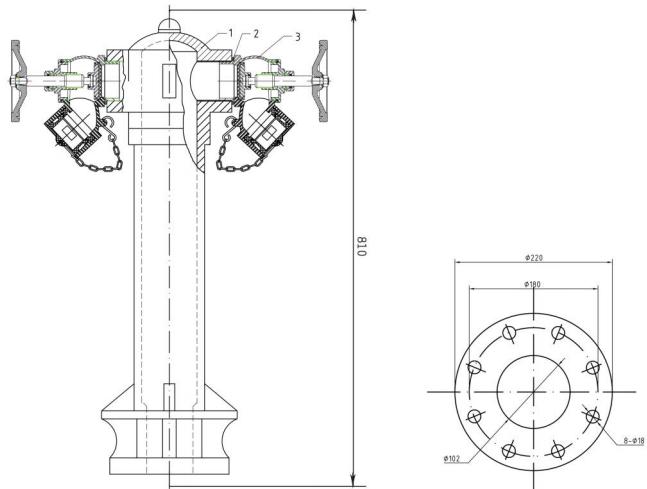

| | |
|-------------|---------------------------|
| Inlet | 4" Flange Outer Dia 220mm |
| Height | 810mm |
| Package | 1 Set / Carton |
| Carton Size | 51x24x83cm |
| N.W / G.W | 44KGS / 45KGS |

Main Material

| No. | Part | Material |
|-----|--------------|----------------|
| 1 | Hydrant body | Ductile Iron |
| 2 | Valve body | Brass |
| 3 | Seat | Brass |
| 4 | Stem | Brass |
| 5 | Handwheel | Gray Cast Iron |
| 6 | Cap | ABS / Brass |
| 7 | Chain | SUS304 |