

Description

The FOC series fire hose rack assembly is designed for efficient, single-person operation in controlling and suppressing fires. This semi-automatic swing rack includes movable pins and features an automatic release mechanism that ensures water is kept out of the hose until the last fold is released when the valve is open. The assembly consists of 6 components: a pin-type hose rack, fire hose, rack nipple, angle hose valve, and hose nozzle, available in 1.5" and 2.5" models.

Features

- Compact and robust structure.
- Saves space and makes the hoses easy to store and extract.
- Facilitates easy operation by one person in emergency fire situations.
- Equipped with an automatic release mechanism to prevent water flow until needed.
- Directly wall-mounted or fixed inside a fire cabinet.
- Components can be customized and matched to specific needs for tailored solutions.




Technical Specifications

Model	FOC-HR-15-40	FOC-HR-15-65
Size	1 1/2"	2 1/2"
Hose Rack	Carbon steel, pin type	Carbon steel, pin type
Fire Hose	1 1/2" x 30m white single jacket hose	2 1/2" x 30m white single jacket hose
Hose Couplings	1 1/2" NH brass or aluminum couplings	2 1/2" NH brass or aluminum couplings
Rack Nipple	1 1/2" brass or aluminum nipple	2 1/2" brass or aluminum nipple
Angle Hose Valve	1 1/2" brass valve	2 1/2" brass valve
Hose Nozzle	1 1/2" brass or plastic jet/spray nozzle	2 1/2" brass or plastic jet/spray nozzle

Note: For other customization requirements, please directly contact FOCUSMASTER team.

Assembly Components

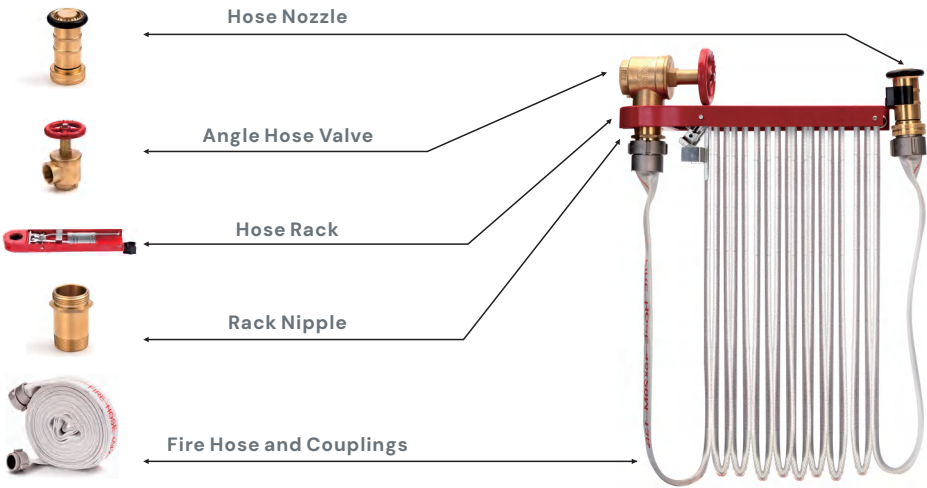

Installation

Furnished complete with all components, the Assembly can be directly wall-mounted or installed inside a fire cabinet for use. If a custom hose rack assembly cabinet is required, please contact the FOCUSMASTER team.

